


“MAQUINADOS GAL”

FABRICACION DE COPLES Y MANTENIMIENTO INDUSTRIAL

LOPEZ LOZANO MARTHA

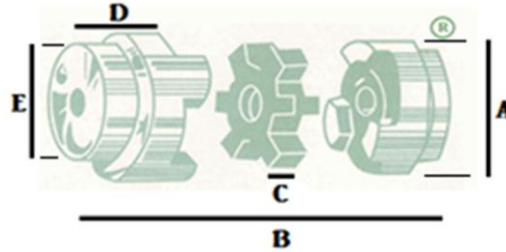

Medidas del Cople tipo “L”							
Numero de Cople	Barreno Piloto/Máximo	Dimensiones diámetro ext. (A)	Longitud total (B)	Espacio del repuesto (C)	Longitud del barreno (D)	Diámetro del mamelón (E)	Peso aprox. con barreno piloto (Kg)
050 (L-050)	- 5/8"	1. 1/8"	1. 5/8"	7/16"	19/32"	1. 1/8"	.150
0 (L-070)	- 3/4"	1. 5/16"	1. 13/16"	7/16"	11/16"	1. 5/16"	.250
.5 (L-075)	1/4" - 7/8"	1. 13/16"	2. 1/4"	7/16"	29/32"	1. 1/2"	.475
1 (L-090)	1/2" - 1"	2. 1/8"	3"	1/2"	1. 1/4"	1. 21/32"	.750
2 (L-100)	1/2" - 1. 1/4"	2. 1/2"	3. 1/4"	9/16"	1. 5/16"	2"	1.250
3 (L-110)	1/2" - 1. 5/8"	3. 3/16"	3. 13/16"	11/16"	1. 1/2"	2. 9/16"	2.300
3.5 (L-150)	5/8" - 1. 7/8"	3. 9/16"	4. 5/8"	15/16"	1. 27/32"	3. 1/16"	3.700
4 (L-190)	5/8" - 2. 1/8"	4. 7/16"	5. 5/16"	15/16"	2. 5/32"	3. 1/2"	6.400
5 (L-225)	13/16"- 2. 1/2"	5. 9/32"	6. 3/8"	1. 3/16"	2. 9/16"	4. 1/4"	11.000
6 (L-275)	1" - 3"	6. 1/16"	8. 1/2"	1. 11/16"	3. 3/8"	5. 1/8"	20.000

“MAQUINADOS GAL”

FABRICACION DE COPLES Y MANTENIMIENTO INDUSTRIAL

LOPEZ LOZANO MARTHA

Cople flexible tipo Love Joy Capacidad de H.P. y R.P.M.											
# COPLE	Factor de servicio	100	300	600	900	1200	1500	1800	2400	3000	3600
0	1.0	.06	.18	.36	.54	.72	.90	1.08	1.44	1.8	2.16
	1.5	.04	.12	.24	.36	.48	.60	.72	.96	1.2	1.44
	2.0	.03	.09	.18	.27	.36	.45	.54	.72	.90	1.08
.5	1.0	.12	.36	.72	1.08	1.44	1.80	2.16	2.88	3.6	4.32
	1.5	.08	.24	.48	.72	.96	1.20	1.44	1.92	2.4	2.88
	2.0	.06	.18	.36	.54	.72	.90	1.08	1.44	1.8	2.16
1	1.0	.28	.84	1.68	2.52	3.36	4.2	5.04	6.72	8.4	10.08
	1.5	.187	.56	1.12	1.68	2.24	2.8	3.36	4.48	5.6	6.72
	2.0	.14	.42	.84	1.26	1.68	2.1	2.52	3.36	4.2	5.04
2	1.0	.60	1.8	3.6	5.4	7.2	9.0	10.8	14.4	18.0	21.6
	1.5	.40	1.2	2.4	3.6	4.8	6.0	7.2	9.6	12.0	14.4
	2.0	.30	.9	1.8	2.7	3.6	4.5	5.4	7.2	9.0	10.8
3	1.0	1.1	3.3	6.6	9.9	13.2	16.5	19.8	26.4	33.0	39.6
	1.5	.73	2.2	4.4	6.6	8.8	11.0	13.2	17.6	22.0	26.4
	2.0	.55	1.65	3.3	4.95	6.6	8.25	9.9	13.2	16.5	19.8
3.5	1.0	1.7	5.1	10.2	15.3	20.4	25.5	30.6	40.8	51.0	61.2
	1.5	1.13	3.4	6.8	10.2	13.6	17.0	20.4	27.2	34.0	40.8
	2.0	.85	2.55	5.1	7.65	10.2	12.75	15.3	20.4	25.5	30.6
4	1.0	2.2	6.6	13.2	19.8	26.4	33.0	39.6	52.9	66.0	79.2
	1.5	1.47	4.4	8.8	13.2	17.6	22.0	26.4	35.2	44.0	52.9
	2.0	1.1	3.3	6.6	9.9	13.2	16.5	19.8	26.4	33.0	39.6
5	1.0	3.3	9.9	19.8	29.7	39.6	49.5	59.4	79.2	99.0	118.8
	1.5	2.2	6.6	13.2	19.8	26.4	33.0	39.6	52.8	66.0	79.2
	2.0	1.65	4.95	9.9	14.85	19.8	24.75	29.7	39.6	49.5	59.4

FACTORES DE SERVICIO:

1.0 - Motores eléctricos

1.5 - Motores de gasolina o diesel, de 6 ó más cilindros

2.0 - Motores de gasolina o diesel de hasta 6 cilindros.

